# ALL IN ONE SWITCH LED DOWNLIGHT



### Also available in Contractor Pack, Emergency & Tilt























### **FEATURES:**

- Effortlessly adjust wattage with the easily accessible front-facing switch. Simply remove the magnetic fascia to switch between colour and wattage—even after installation.
- Includes Plug'n'Play as standard (GST18 Connector 8/10W)
- 4 CCT Discreet colour temperature changing switch
- Less storage space needed for stock due to All In One product features
- New design no ventilation space needed, directly coverable with insulation

#### **APPLICATIONS**















BATH & SHOWER

COMMERCIAL

EDUCATION

HOME &
RESIDENTIAL

LOBBIES & CORRIDORS

OFFICES

RETAIL



# ALL IN ONE SWITCH LED DOWNLIGHT


## 3CCT & Wattage Switchable

Part No.	231554	231530	173496	231516	
DESCRIPTION	All in One Switch Downlight				
BEZELS INCLUDED	White			White, Brushed Steel, Polished Chrome	
DIMENSIONS	82 x 65 x 475 (incl. driver) 82 x		82 x 65 x	56.5 (excl. driver)	
CUT OUT	65mm diameter				
POWER CONSUMPTION (W)	4w/6w	6w/8w	8	8w/10w	
LUMENS	480/720lm	720/960lm	960	960/1200lm	
COLOUR SWITCHABLE	2700K / 3000K / 4000K / 6000K				
COLOUR RENDITION (CRI)	Ra>80				
IP RATING	IP65 (with bezel only)				
CONSTRUCTION	Aluminum / Steel / Polycarbonate				
FIRE RATING	BS476-21 30/60/90 minutes				
BEAM ANGLE	60°				
LIFETIME	50,000hrs				
SWITCH CYCLES	100,000				
WORKING TEMPERATURES	-10°- 40°				
ENERGY CONSUMPTION	10kWh				
CERTIFICATION	CE, ROHS				
UGR RATING	28				
IK RATING	IK07				
CONTRACTOR PART CODE	173533	173557	173519	9 N/A	

WARRANTY

1 year (+6 year extended warranty with online registration)

### **Measurement Specifications**

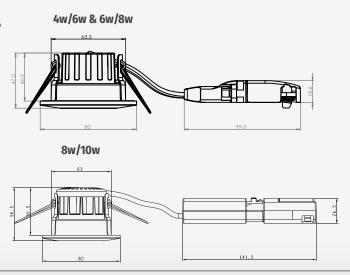

# Easily switch the colour temperature after installation

EXCELLENT PERFORMANCE FROM THE **ALL IN ONE** RANGE

